


MINITIMER Timer, On delayed IK 9906, SK 9906



- According to IEC/EN 61 812-1
- 8 time ranges from 0.05 s to 300 h selectable via rotational switches
- Voltage range AC/DC 12 ... 240 V
- Adjustment aid for quick setting of long time values
- Suitable for 2-wire proximity sensor control
- 1 changeover contact
- As option connection of a remote potentiometer 10 kΩ
- As option with time interruption / time adding input
- LED indicators for operation, contact position and time delay
- **Devices available in 2 enclosure versions:**
 - IK 9906:** depth 59 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - SK 9906:** depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct.
- 17.5 mm width

Function Diagram

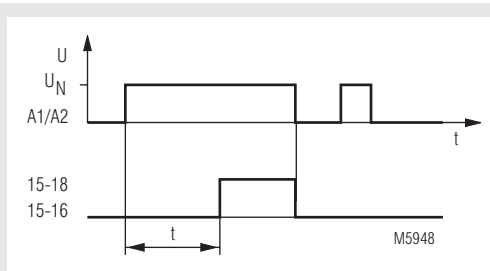

Approvals and Marking




Application

Time-dependent controllers

Indications

- | | |
|---------------------------------|--|
| green LED: | on when voltage connected |
| yellow LED "R/t": | shows status fo output relay and time delay: |
| - Flashing (short on, long off) | output relay not active; |
| | time delay |
| - Continuously on: | output relay active; |
| | no time delay |

Circuit Diagram

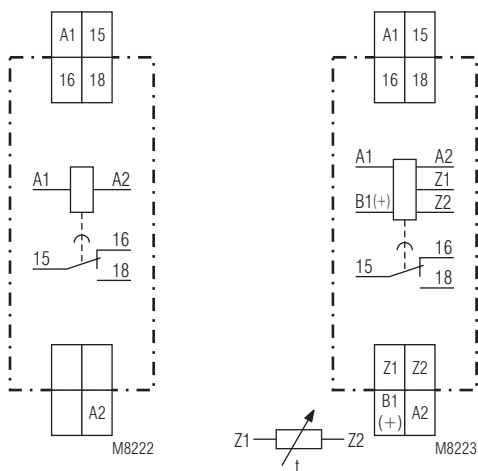

IK 9906.81
SK 9906.81

IK 9906.81/500
SK 9906.81/500

Notes

Control of A1-A2 with proximity sensors

The input can be controlled by DC 3 wire or AC/DC 2 wire proximity sensors. For operating voltage > 24 V and usage of sensors without built-in short circuit protection a protection resistor on A1 is recommendd to reduce the inrush current. The dimension is as follows:

$R_v \approx$ operating voltage / max. switching current of sensor

The series resistor must not be selected higher than necessary.

Max. values are:

Operating voltage:	48 V	60 V	110 V	230 V
Series resistor R_v max:	270 Ω	390 Ω	680 Ω	1.8 kΩ (1 W)

Adjustment assistance

The flashing period of the yellow LED is 1 s ± 4% and can be used to adjust the time. Especially on the lower end of scale and for long times it is suitable as the multiplication factors between the different time ranges are exact without tolerance.

Example:

The required time is 40 min. It has to be adjusted within the range 3 ... 300 min. The time check takes too long as several timing cycles would be necessary for a precise value.

For faster adjustment the setting is made to 0.03 ... 3 min. On this range the potentiometer should be set to 0.4 min (= 24 sec). With the right potentiometer setting the LED must show 24 flashing cycles. After that the time range is switched over to 3 ... 300 min and the setting is complete.

Time interruption / Time adding

With the model IK/SK 9906.81/500 the timing cycle can be interrupted by controlling input B1 (+) with control voltage. Removing the control signal will continue the timing cycle (time addition). When time is interrupted the yellow LED goes off.

Control input B1

The control input B1 (+) has to be supplied with voltage against A2. The control signal could be the same as the auxiliary/control voltage of A1 or any other voltage between 12 and 240 V AC or DC. Operating a parallel load between B1 and A2 is also possible.


Notes

Remote potentiometer

With the variant IK/SK 9906.81/500 the time setting can also be made via remote potentiometer of 10 kOhms. It is connected to the terminals Z1-Z2. The corresponding potentiometer on the relay has to be set to min. If no remote potentiometer is required the terminals Z1-Z2 have to be linked. The wires to the remote potentiometers should be installed separately from the lines with mains voltage. If this is not possible, a screened cable is recommended where the shield is connected to Z1.

To terminals Z1 and Z2 no external voltage must be connected, as the unit might be damaged.

Setting

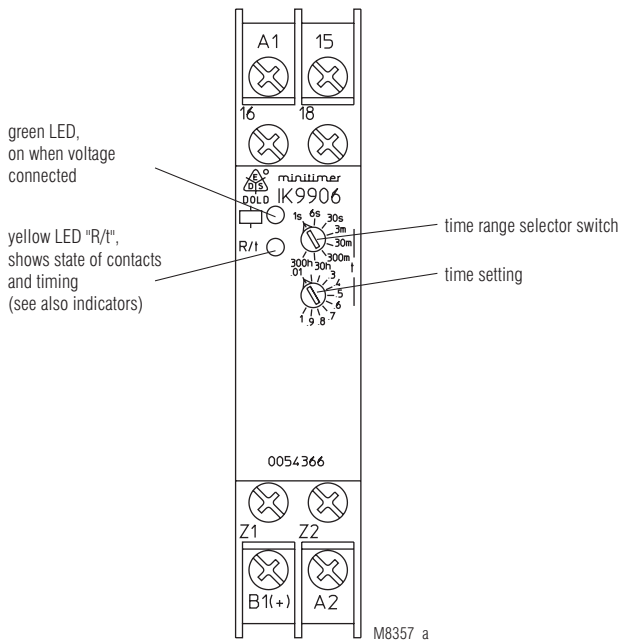

Technical Data

Time circuit

Time ranges:	8 time ranges settable via rotational switch:	
	0.05 ... 1 s	0.3 ... 30 min
	0.06 ... 6 s	3 ... 300 min
	0.3 ... 30 s	0.3 ... 30 h
	0.03 ... 3 min	3 ... 300 h
Time setting t:	continuous, 1:100 on relative scale	

Recovery time:

at DC 24 V:	approx. 15 ms
at DC 240 V:	approx. 50 ms
at AC 230 V:	approx. 80 ms
Repeat accuracy:	± 0.5 % of selected end of scale value + 20 ms

Voltage and temperature influence:

	≤ 1 % with the complete operating range
--	---

Input

Nominal voltage U_N:	AC/DC 12 ... 240 V
Voltage range:	0.8 ... 1.1 U_N
Frequency range (AC):	45 ... 400 Hz
Nominal consumption	
at AC 12 V:	approx. 1.5 VA
at AC 24 V:	approx. 2 VA
at AC 240 V:	approx. 3 VA
at DC 12 V:	approx. 1 W
at DC 24 V:	approx. 1 W
at DC 240 V:	approx. 1 W
Release voltage (A1/A2)	
AC 50 Hz:	approx. 7.5 V
DC:	approx. 7 V

Technical Data

Max. permitted residual current with 2-wire proximity sensor control (A1-A2)

up to AC/DC 150 V:	AC resp. DC 5 mA
up to AC/DC 264 V:	AC resp. DC 3 mA

Control voltage (B1/A2)

IK/SK 9906.81/500:	AC/DC 12 ... 240 V
Voltage range (B1/A2):	0.8 ... 1.1 UN

Control current (B1)

IK/SK 9906.81/500:	input resistance approx. 220 kΩ in series with diode
--------------------	--

Release voltage (B1/A2)

IK/SK 9906.81/500:	
AC 50 Hz:	approx. 5 V
DC:	approx. 4 V

Output

Contacts

IK/SK 9906.81:	1 changeover contact
Thermal current I_{th}:	4 A

Switching capacity

to AC 15		
NO contact:	3 A / AC 230 V	IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V	IEC/EN 60 947-5-1
to DC 13:	1 A / DC 24 V	

Electrical life

to AC 15 at 1 A, AC 230 V:	1.5 x 10 ⁵ switching cycles	IEC/EN 60 947-5-1
----------------------------	--	-------------------

Permissible switching frequency:

	36 000 switching cycles / h
--	-----------------------------

Short circuit strength

max. fuse rating:	4 A gL	IEC/EN 60 947-5-1
Mechanical life:	≥ 30 x 10 ⁶ switching cycles	

General Data

Operating mode:

Continuous operation

Temperature range:

- 40 ... + 60°C

Clearance and creepage distances

rated impuls voltage / pollution degree:	4 kV / 2	IEC 60 664-1
--	----------	--------------

EMC

Electrostatic discharge:	8 kV (air)	IEC/EN 61 000-4-2
Fast transients:	2 kV	IEC/EN 61 000-4-4

Surge voltages

between wires for power supply:	1 kV	IEC/EN 61 000-4-5
HF-wire guided:	10 V	IEC/EN 61 000-4-6

Degree of protection

Housing:	IP 40	IEC/EN 60 529
Terminals:	IP 20	IEC/EN 60 529

Housing:

Thermoplastic with V0 behaviour according to UL subject 94

Vibration resistance:

Amplitude 0.35 mm, frequency 10 ... 55 Hz, IEC/EN 60 068-2-6 40 / 060 / 04 IEC/EN 60 068-1

Climate resistance:

Terminal designation:

Wire connection:

EN 50 005
2 x 2.5 mm² solid or 2 x 1.5 mm² stranded wire with sleeve
DIN 46 228-1/-2/-3/-4
Flat terminal with self-lifting clamping piece IEC/EN 60 999-1
DIN rail IEC/EN 60 715

Wire fixing:

Mounting:

Weight:

IK 9906:	approx. 65 g
SK 9906:	approx. 84 g

Dimensions

Width x height x depth:

IK 9906:	17.5 x 90 x 59 mm
SK 9906:	17.5 x 90 x 98 mm

Standard Type

IK 9906.81 AC/DC 12 ... 240 V 0.05 s ... 300 h

Article number:

0054364

- Output: 1 changeover contact
- Nominal voltage U_N : AC/DC 12 ... 240 V
- Time ranges: 0.05 s ... 300 h
- Width: 17.5 mm

SK 9906.81 AC/DC 12 ... 240 V 0.05 s ... 300 h

Article number:

0054364

- Output: 1 changeover contact
- Nominal voltage U_N : AC/DC 12 ... 240 V
- Time ranges: 0.05 s ... 300 h
- Width: 17.5 mm


Variant

IK/SK 9906.81/500:

- Connection facility for a remote potentiometer 10 kOhms to adjust the time
- Additional control input B1 for time interruption / time addition

Ordering example for variant

IK 9906 .81 / _ _ AC/DC 12 ... 240 V 0.05 s ... 300 h

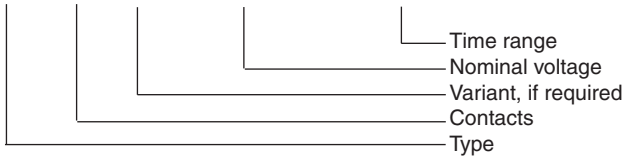

Accessories


AD 3:

External potentiometer 10 kΩ



The external potentiometer is used for remote setting of the time delay. The internal potentiometer of the timer must be set to min. time delay.

Degree of protection front side:


IP 60

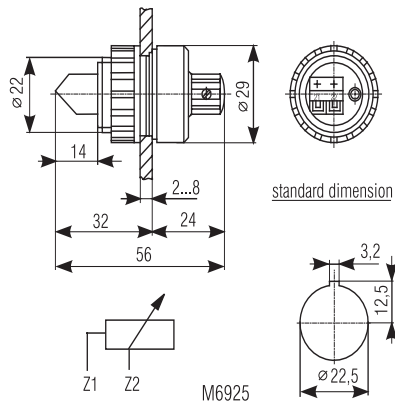

Connection Diagrams

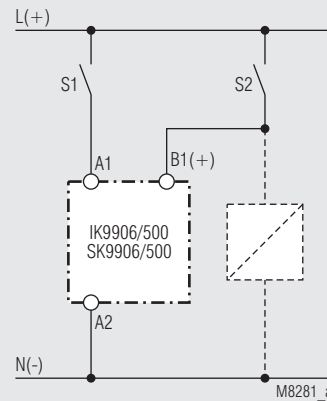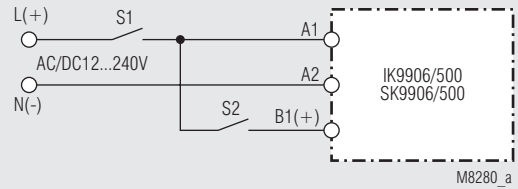

Control with parallel connected load

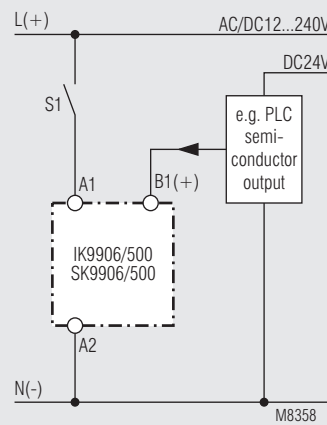

Connection with 2 different control voltages

