



## VARIMETER Undervoltage Relay IL 9071, SL 9071

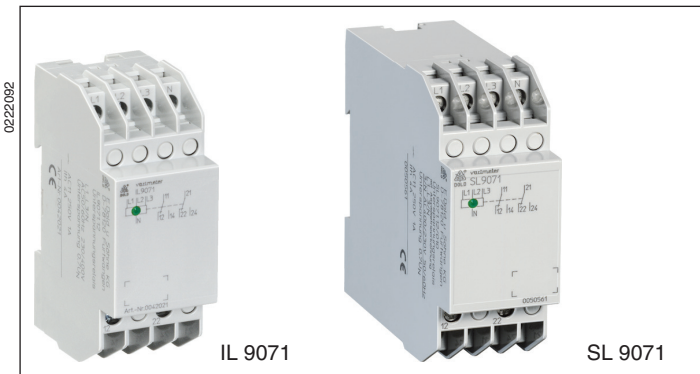


- According to IEC/EN 60 255, DIN VDE 0435-303
- Identification of
  - undervoltage
  - phase failure
  - asymmetry also with reverse voltage
  - missing neutral in the system
  - broken neutral on IL/SL 9071
  - neutral exchanged against phase
- Single phase connection possible
- According to DIN VDE 0100-710 (for rooms used for medical purposes) as an option
- Fixed setting value (variable as an option)
- Closed circuit operation principle
- LED indicator
- With safe disconnection according to IEC/EN 61 140, IEC/EN 60 947-1 between the Measuring Circuit and the contacts
- Independant of phase sequence
- 2 changeover contacts
- **Devices available in 2 enclosure version:**
  - IL 9071:** depth 61 mm with terminals at the bottom for installations systems and industrial distribution systems according to DIN 43 880
  - SL 9071:** depth 98 mm with terminals at the top for cabinets with mounting plate and cable duct
- Width 35 mm

### Function Diagram

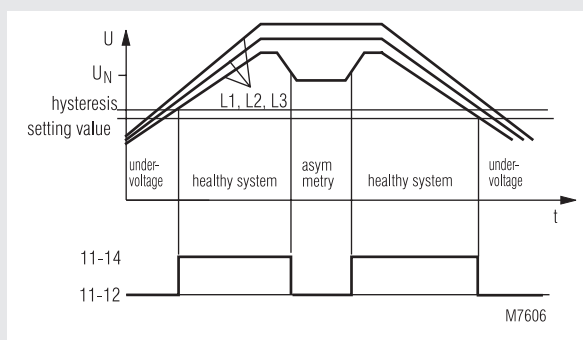

### Circuit Diagram

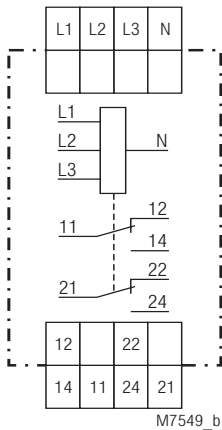

IL 9071.12, SL 9071.12

### Additional Information about this topic

- datasheet undervoltage relay IK/IL 9171
- Relay workshop No. 15 and No. 16:  
The meaning of asymmetry in 3 phase systems (only in German)

### Approvals and Markings



### Application

Monitoring of three-phase voltage systems to identify undervoltage, asymmetry or phase failure and switching-on of safety lighting in accordance with DIN VDE 0108.

Neutral monitoring in 3-phase systems. In 3-phase systems with neutral often also single phase load are connected between phase and neutral. If the neutral is missing in a system like this unsymmetric voltages occur that could damage single phase consumers if the voltage rises too high. Also consumers can stop to work if the phase-neutral voltage gets too low. The IL 9071 detects this problem and can switch of the system immediately.

### Indication

green LED: on, when the mains system is working properly (contact 11-14 and 21-24 closed)

### Notes

For single phase operation the terminals L1, L2 and L3 have to be bridged

## Technical Data

### Input

#### Nominal voltage $U_N$ :

single-phase connection: AC 100 V, 115 V, 220 V, 230 V,  
AC 400 V, 415 V, 440 V, 500 V

3-phase without  
neutral connection: 3AC 100 V, 115 V, 220 V, 230 V,  
3AC 400 V, 415 V, 440 V, 500 V

3-phasig with  
neutral connection: 3/N AC 100 V / 58 V; 3/N AC 110 V / 64 V;  
3/N AC 200 V / 115 V; 3/N AC 220 V / 127 V;  
3/N AC 230 V / 133 V; 3/N AC 400 V / 230 V;  
3/N AC 415 V / 240 V; 3/N AC 440 V / 254 V;  
3/N AC 500 V / 290 V

**Overload:** AC 440 V on all measuring inputs,  
for at least 1 h

**Voltage range:** 0.7 ... 1.1  $U_N$   
**Nominal consumption** approx. 6 VA (L3-N)

**Nominal frequency:** 50 / 60 Hz

**Frequency range:** 45 ... 65 Hz

**Input current at  $U_N$ :** L1-N, L2-N: approx. 1.5 mA

L3-N: approx. 25 mA

### Setting Ranges

#### Setting value $U_{off}$

IL 9071/010, SL 9071/010: 0.7  $U_N$  or 0.85  $U_N$  (hysteresis approx. 4 %)

IL 9071/117, SL 9071/117: 0.7 ... 0.95  $U_N$  (hysteresis approx. 4 %)

#### Asymmetry identification

IL 9071/117, IL 9071/010,  
SL 9071/117, SL 9071/010: approx. 5 ... 10 % phase asymmetry

### Output

#### Contacts

IL 9071.12, SL 9071.12: 2 changeover contacts

**Thermal current  $I_{th}$ :** 4 A

**Switching capacity** IEC/EN 60 947-5-1

AC 15

NO contact: 3 A / AC 230 V

NC contact: 2 A / AC 230 V

**Electrical life** IEC/EN 60 947-5-1

AC 15 at 1 A, AC 230 V: 5 x 10<sup>5</sup> switching cycles

#### Short circuit strength

**max. fuse rating:** 4 A gL IEC/EN 60 947-5-1

**Mechanical life:** 30 x 10<sup>6</sup> switching cycles

### General Data

**Operating mode:** Continuous operation

**Temperature range:** - 20 ... + 60°C

#### Clearance and creepage distances

rated rated impulse voltage voltage /

pollution degree: 4 kV / 2 IEC 60 664-1

between Measuring Circuit  
and contacts 6 kV / 2

#### EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2

HF irradiation: 10 V / m IEC/EN 61 000-4-3

Fast transients: 4 kV IEC/EN 61 000-4-4

Surge voltages  
between

wires for power supply: 2 kV IEC/EN 61 000-4-5

between wire and ground: 2 kV IEC/EN 61 000-4-5

Interference suppression: Limit value class B EN 55 011

**Degree of protection:** Housing: IP 40 IEC/EN 60 529

Terminals: IP 20 IEC/EN 60 529

**Housing:** Thermoplastic with V0 behaviour  
according to UL subject 94

**Vibration resistance:** Amplitude 0.35 mm,  
frequency 10 ... 55 Hz, IEC/EN 60 068-2-6

**Climate resistance:** 20 / 060 / 04 IEC/EN 60 068-1

## Technical Data

### Terminal designation:

EN 50 005

### Wire connection:

2 x 2.5 mm<sup>2</sup> solid or  
2 x 1.5 mm<sup>2</sup> stranded ferruled  
DIN 46 228-1/-2/-3/-4

### Wire fixing:

Flat terminals with self-lifting  
clamping piece IEC/EN 60 999-1  
DIN rail IEC/EN 60 715

### Mounting:

#### Weight

IL 9071/010: 122 g

SL 9071/010: 168 g

### Dimensions

#### Width x height x depth

IL 9071: 35 x 90 x 61 mm

SL 9071: 35 x 90 x 98 mm

### Standard Types

IL 9071.12/010 3/N AC 400 / 230 V 0.85  $U_N$

Article number: 0047074

SL 9071.12/010 3/N AC 400 / 230 V 0.85  $U_N$

Article number: 0051006

- with asymmetry detection

- 2 changeover contacts

- Nominal voltage  $U_N$ : AC 230 / 3 AC 400 V

- Setting value: 0.85  $U_N$


- Width: 35 mm

### Variants

IL 9071/117, SL 9071/117: according to DIN VDE 0100-710, rooms  
used for medical purposes, variable  
setting value

### Ordering example for variants

IL 9071 .12 / \_ \_ \_ 3/N AC 400 / 230 V 50/60 Hz 0.7  $U_N$

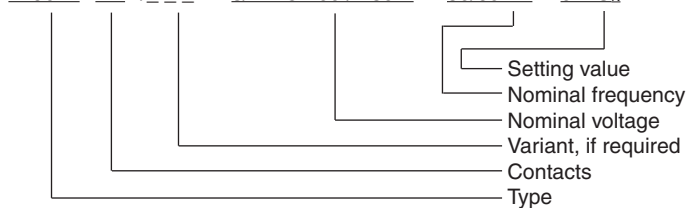

### Specification for Tender for IL 9071

Undervoltage relay according to IEC/EN 60 255, DIN VDE 0435-303 to be  
built in consumer units with identification of phase and neutral failure in 3  
phase systems with neutral-line 230/400 V, setting value 0.85  $U_N$ , closed  
circuit operation, 2 changeover contacts, LED indicator.

Width 35 mm.

Type IL 9071.12

Manufactured by: E. DOLD & SÖHNE KG

Undervoltage relay according to IEC/EN 60 255, DIN VDE 0435-303 to be  
built in consumer units with identification of phase and neutral failure in 3  
phase systems with neutral-line 230/400 V, setting value 0.7  $U_N$ , closed  
circuit operation, 2 changeover contacts, LED indicator.

Width 35 mm.

Type IL 9071.12

Manufactured by: E. DOLD & SÖHNE KG